

Reduce Downtime & Maintenance with DuraLev[®] Bearingless Pumps!



No Seals, No Bearings, No Problems!

DuraLev® R65S

4 bar 100 liters/min (58 psi) (26 gallons/min)



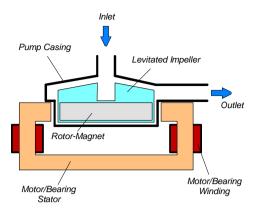


Figure 1: Schematic of the main elements of the maglev centrifugal pump

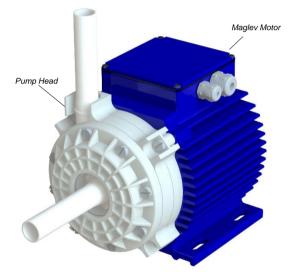


Figure 2: Maglev motor with pump head

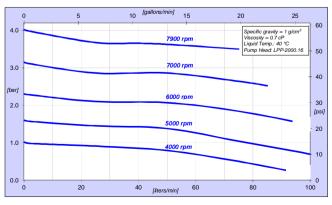


Figure 3: Pressure/flow curves

REVOLUTIONARY MAGNETICALLY LEVITATED CENTRIFUGAL PUMP

The *DuraLev® R65S* pump system is a revolutionary centrifugal pump that has no bearings to wear out or seals to break down and fail. Based on the principles of magnetic levitation, the pump's impeller is suspended, contact-free, inside a sealed casing and is driven by the magnetic field of the motor (*Figure 1*). The impeller and casing are both fabricated from chemical-resistant high purity fluorocarbon resins. Together with the rotor magnet they make up the pump head. Fluid flow rate and pressure are precisely controlled by electronically regulating the impeller speed and eliminating pulsation.

The pump system consists of a controller with an integrated user panel allowing the operator to set the speed manually (see *Figure 4*). The speed is automatically stored in the internal EEPROM of the controller. As an option, the speed can also be set with an analog signal (see specification for *Position 3a* in *Table 2*).

SYSTEM BENEFITS


- Low particle generation due to the absence of mechanically contacting parts.
- Increases equipment uptime.
- Lower maintenance costs by eliminating valves, bearings, rotating seals and costly rebuilds.
- Reduced risk of contamination due to the self-contained design with magnetic bearings.
- Very gentle to sensitive fluids due to low-shear design.
- Smooth, continuous flow without pressure pulsation.
- Electronic speed control.
- Compact design compared to pneumatic and magdrive pumps. Saves valuable space in process tools by having a smaller footprint.
- Proven technology in medical and semiconductor industry (MTBF > 50 years).


APPLICATIONS

- Semiconductor wet processing.
- Solar cell production.
- Metal plating
- Flat panel display manufacturing.
- Hard-disk fabrication.
- Printer ink handling.

DuraLev 🛕

Bearingless Pump System DuraLev[®] R65S MagLev Pumps for Pure Fluid Handling

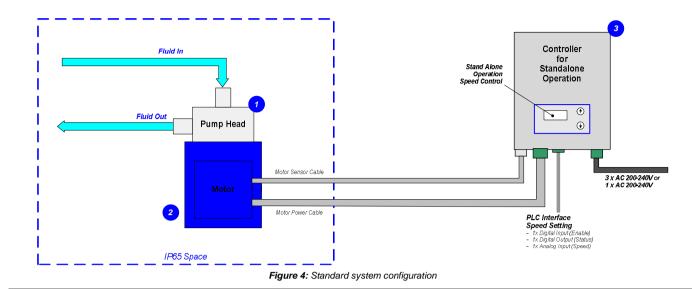








Figure 5: Dimensions of controller LPC-2000.1-10 Note 1: Non-tolerated dimensions are for reference only.

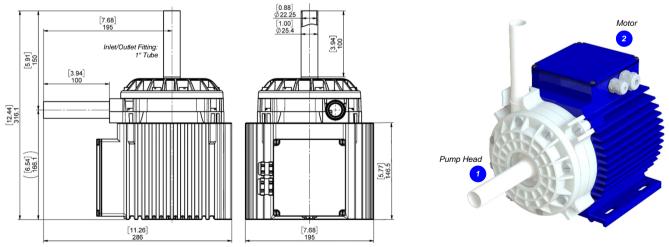


Figure 6: Dimensions of motor LPM-2000.12 with pump head LPP-2000.16 Note 1: Non-tolerated dimensions are for reference only.



ORDER INFORMATION

System Name		Article #	Pump Head	Controller		Motor	Note		
DuraLev-R65S.1		100-91056	LPP-2000.16	LPC-2000.1-10		LPM-2000.12	Certifications: CE		
Table 1: Standard system configuration									
Pos.	Component		Article Name	Article #	Chara	acteristics	Value / Feature		
					Reinfo	er / Pump Housing rcing Housing g Ring / Fittings	PFA / PFA (wet parts) PP + GF30 FFPM (=FFKM) (perfluoroelastomer) / Tube 1"		
1	Pump Head		LPP-2000.16	100-91042	Max. V	low iff. Pressure fiscosity iquid Temperature	100 liters/min / 26 gallons/min 4 bar / 58 psi 30 cP 80°C / 176°F		
0	Matar		L DM 2000 42	100 10102	Housin	g	Epoxy coated Aluminum, IP65 without connectors		
2	Motor		LPM-2000.12	100-10102	Cable /	/ Connectors	2x 6m cables with PVC jacket and direct connection to the controller.		
			LPC-2000.1-10	100-30075 (Supply and PLC connector included)		e / Power g Rating	1 or 3 x 200-240 V AC ±10% / 2kW ® 50/60Hz IP20		
	Standalone Controller (User Panel)				Interfaces for Standalone Controller	Panel to set speed (automatic storage on internal EEPROM)			
3						1x analog input ("Speed") 4 - 20 mA PLC with 1x digital input ("Enable") 0 - 24 V (oplocoupler) 1x digital output ("Status") 0 - 24 V (relais)			
					Standa	rd Firmware	E0.25		

Table 2: Specification of standard components





Figure 7: Pump system with standard components

LEVITRONIX[®] THE COMPANY

Levitronix® is the world-wide leader in magnetically levitated bearingless motor technology. *Levitronix®* was the first company to introduce bearingless motor technology to the Semiconductor, Medical and Life Science markets. The company is ISO 9001 certified. Production and quality control facilities are located in Switzerland.

Headquarter and European Contact	US Contact	Japan Contact	Taiwan Contact	
Levitronix GmbH	Levitronix Technologies Inc.	Levitronix Japan K.K.	Levitronix Taiwan	
Bändliweg 30	10 Speen Street, Suite 102	Wing Eight 5floor, 4-16-4	5F, No. 251, Dong Sec. 1,	
CH-8048 Zurich	Framingham, Massachusetts 01701	Asakusabashi, Taito-ku	Guangming 6th Rd., Chu Pei City,	
Switzerland	USA	Tokyo, 111-0053 Japan	Hsin-Chu 302, Taiwan, R.O.C.	
Phone: +41 44 974 4000	Phone: +1 508 861 3800	Phone: +81 3 5823 4193	Phone: +886 3 657 6209	
E-Mail: <u>salesEurope@levitronix.com</u>	E-Mail: <u>salesUS@levitronix.com</u>	E-Mail: <u>salesJapan@levitronix.com</u>	E-Mail: <u>salesAsia@levitronix.com</u>	

This document and its content is the property of Levitronix[®] and shall not be reproduced, distributed, disclosed or used for manufacturing or sale of Levitronix[®] products without the expressed written consent of Levitronix[®].

PL-4059-00, Rev01, DCO#23-180

First Release: 12-Dec-2016

Last Update: 06-Sep-2023